

# OXI-REACTIVE-OIL FOR ROLLING



## Trends Concerning Surfaces

Oiling naturally at the speed of light.

- > Ecologically based on natural oil
- > Natural matt look
- > Ö-Norm certified to C 2380

## For industrial coating of flat parts.



### Achieve the finished product in the shortest drying times

You can use our Oxi-reactive-oil to add highly resistant and lasting protection to parquet, furniture, doors and panels, all with a level of scratch resistance that cannot be achieved using a classic oil coating.

Increase your productivity! From bare wood to a packable product in less than 6 minutes. Save time and money, both via processing and the reduction of interim storage. Hesse Oxi-reactive-oil for rolling will help you optimise your processes.


Arrange an appointment with your specialist adviser right away and we will convince you of the benefits of our oil innovation.

## Colourless or coloured?

Both are possible with the Hesse Oxi-reactive-oil for rolling product range

	Base oils	Cover oils	Advantages
Colourless ex works	<b>ROG</b> A colourless base oil <b>RWOG</b> Base oil for pre-coating on alkaline substrates like smoked oak or thermally treated wood	<b>RO</b> A colourless cover oil. This is used to build up layers on ROG/RWOG, or as base and cover oil in one	> It is possible to create structures using only one RO product > Flexible system toning using ROZ colour pastes, e.g. to account for colour tone differences in the substrate
Coloured ex works	<b>ROP</b> Tinted base oil	<b>ROB</b> A tinted cover oil for creating special effects	> Reproducible colour tones > Ready to use > Easy handling

## To packable product in under 6 minutes!

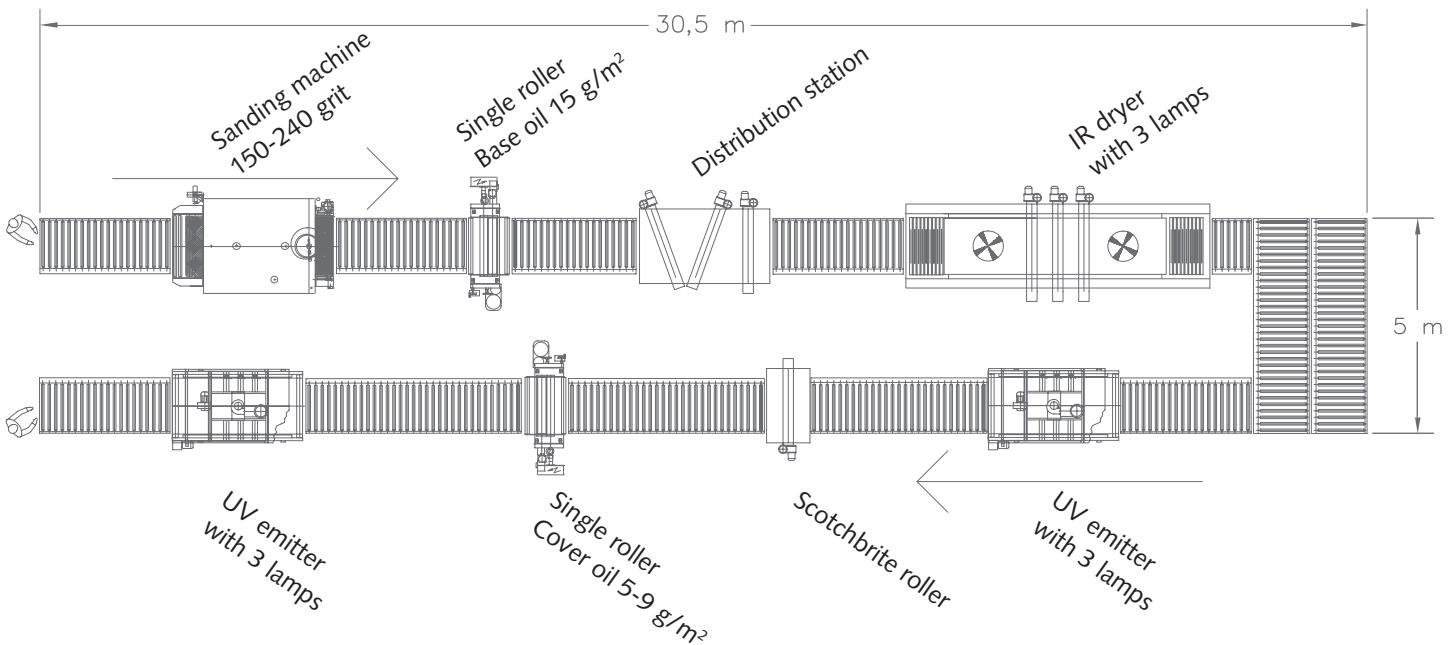

## Faster. Much faster.

Competitor drying time



- > Drying 16 h
- > Further processing
- > Coloration
- > Drying 16 h
- > Packing
- > Minimum time required 48 h

Hesse Oxi-reactive-oil for rolling industrial drying time



- > Dry in under 6 minutes
- > Finished surfaces can be packed immediately
- > Packing
- > Time saving compared to the competition 48 h





Hesse GmbH & Co. KG  
Warendorfer Str. 21  
59075 Hamm – Germany

Tel.: + 49 2381 96300  
Fax: + 49 2381 963849

E-mail: [info@hesse-lignal.de](mailto:info@hesse-lignal.de)  
[www.hesse-lignal.de](http://www.hesse-lignal.de)

